

Title
X30-F-ER25

Item-No.
XP131



Scale	Rev.	Date	Sheet
2:1	A	02.11.2023	1

Technical Data - X30 - Semi-automatic tool change

Power: 3,0 kW | 4,0 kW | 5,0 kW

Voltage: 400 V

Number of poles: 2-pole | 4-pole

Cooling method: Liquid cooling

Tool interface: ER25

Clamping range: 1 - 20 mm

Rotational speed: 20.000 - 35.000 rpm

Spindle bearings: Steel bearings | Hybrid bearings

Temperature sensor: PTC | PT100 (bearing, coil end)

Rotational speed sensor: Incremental | Inductive


Motor plug: 9-pole straight | 9-pole angled

Sensor plug: 17-pole straight | 17-pole angled

Coolant connection: 8 mm straight | 8 mm angled

Protection class: IP54 | IP65

Weight: 9,5 kg

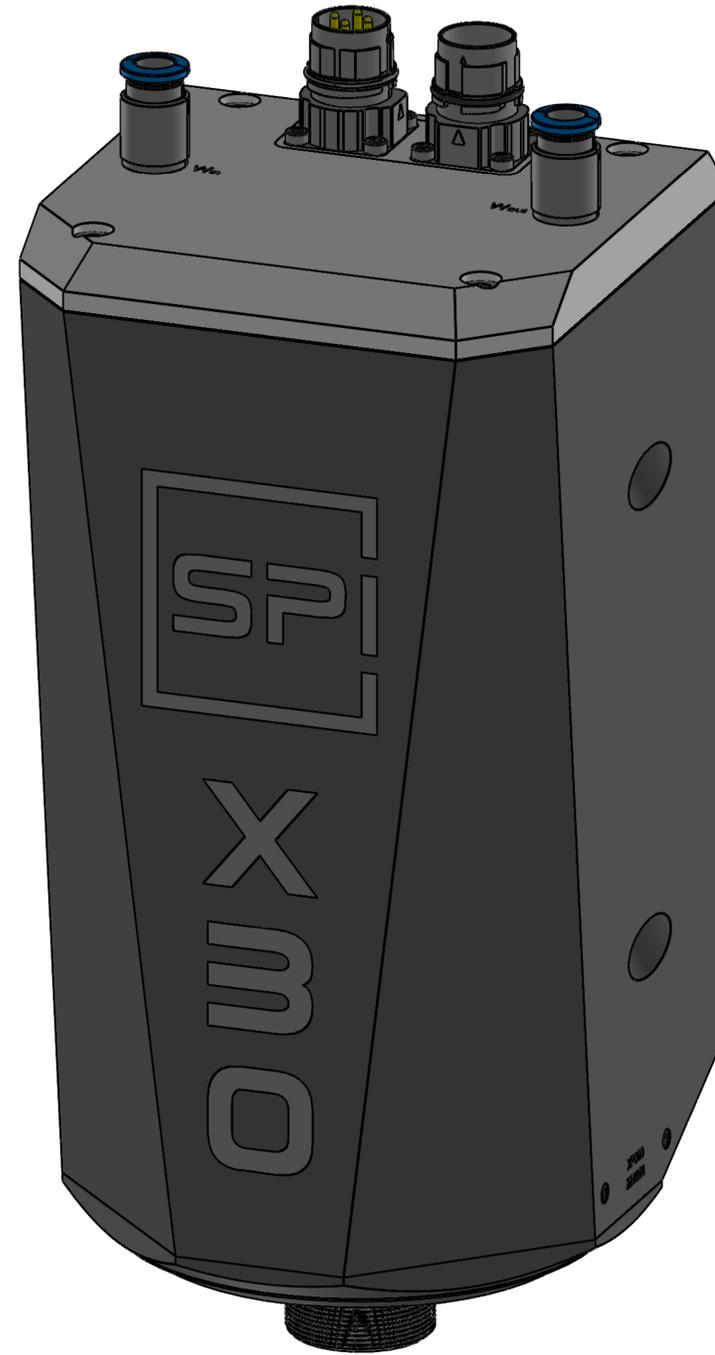

Full equipment
(Sensor plug required from the second sensor on)



Basic configuration

Title
X30-F-ER25

Item-No.
XP131



Scale	Rev.	Date	Sheet
2:1	A	02.11.2023	2